



300 Gallon Platform Series

850 McFarland Parkway - Alpharetta, GA 30004 www.usjetting.com / sales@usjetting.com 1-800-JETTING / 770-740-9917 / Fax: 770-740-0297

Central Control Panel
Attached To Hose Reel,
Optional Wireless Remote
Control System

Hydraulic Powered, 7 Position Swivel Hose Reel
With 500' Of High Pressure Jetting Hose

325 Gallon Rotationally Molded
High Density Polyethylene
(HDPE) Water Tank

Optional Hydraulic
Power Pull-Out
Hose Reel

**Rust Free Powder Coated
Aluminium Components**

- Toolboxes
- Anti-Freeze Tank
- Diesel Fuel Tank
- Fenders
- Control Panel

Jump Jet
Pulsation
System

Available Diesel Engines:

- Hatz Silent Pack Diesel (shown)
- Hatz Non-Silent Pack Diesel
- Kubota TurboCharged Diesel

Lockable Tool
Boxes On Each Side

2" x 4" Welded
Steel Frame


Self Contained
Anti-Freeze
System

7,000 Lb. Torque Flex Axle With
16" Tires / 8 Lug Chrome Wheels
(Electric or Hydraulic Braking System)

US Jetting Run-Dry Pump

4,000 PSI or 5,000 PSI

Available Flows of 14, 18 or 25 GPM

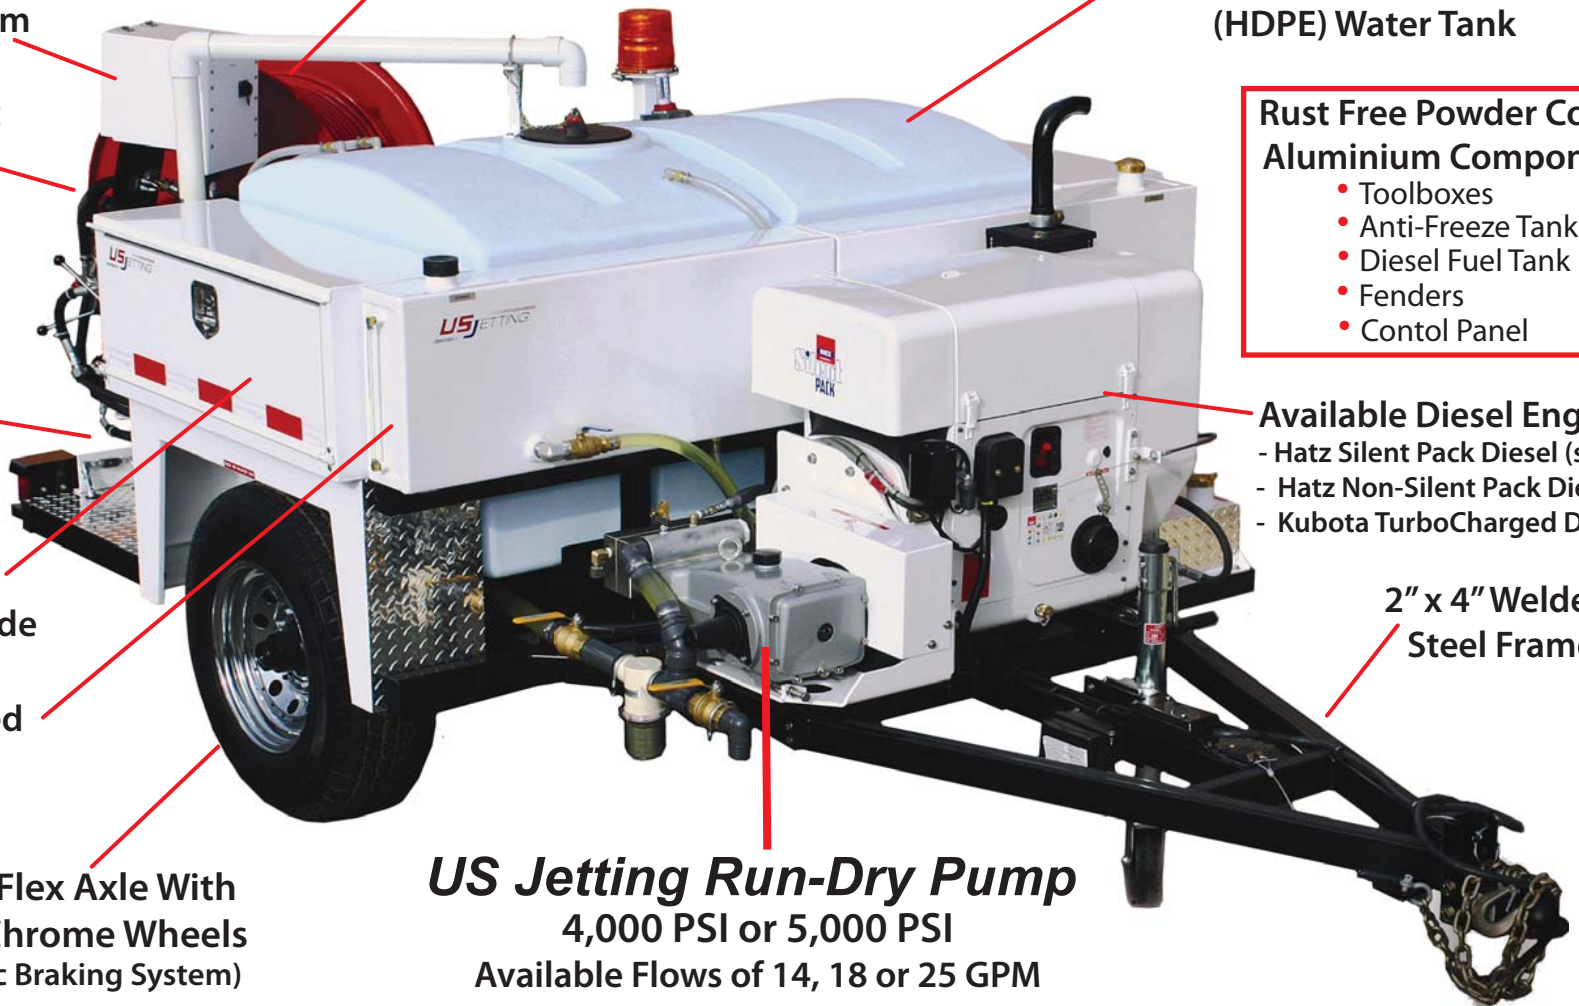

US Jetting Pump Model	Engine (Diesel)	Horsepower	PSI	GPM	Hose Dia.	Hose Length (Std.)	Pump Cyls.	Jump Jet	Flow Bypass Valve
USJ 4018 Run-Dry Pump	Hatz 3-Cyl SilentPack	49	4,000	18	1/2"	500'	3	Std.	Std.
	Hatz 3-Cyl Non-Silent	49	4,000	18	1/2"	500'	3	Std.	Std.
	Kubota 4-Cyl Turbocharged	49	4,000	18	1/2"	500'	3	Std.	Std.
USJ 4025 Run-Dry Pump	Hatz 4-Cyl SilentPack	66	4,000	25	5/8"	500'	3	Std.	Std.
	Kubota 4-Cyl Turbocharged	84	4,000	25	5/8"	500'	3	Std.	Std.
USJ 5014 Run-Dry Pump	Hatz 3-Cyl SilentPack	49	5,000	14	1/2"	500'	3	Std.	Std.
USJ 5014 Run-Dry Pump	Hatz 3-Cyl Non-Silent	49	5,000	14	1/2"	500'	3	Std.	Std.
USJ 5018 Run-Dry Pump	Hatz 4-Cyl SilentPack	66	5,000	18	1/2"	500'	3	Std.	Std.
USJ 4016 RPD Pump Run-Dry Pump	Hatz 3-Cyl SilentPack	49	Up to 4,000	Up to 16	1/2"	500'	8	Std.	Opt.
	Hatz 3-Cyl Non-Silent	49	Up to 4,000	Up to 16	1/2"	500'	8	Std.	Opt.
	Kubota 4-Cyl Turbocharged	49	Up to 4,000	Up to 16	1/2"	500'	8	Std.	Opt.

Optional Power PullOut Hydraulic Hose Reel



Hose reels can be equipped with 1/2" or 5/8" high pressure jetting hose to complement any US Jetting PumpSet

Features

- Gen 4 Wireless Remote Control System (Optional)
- Hydraulic Power Pull-Out, 7-Position Hose Reel (Optional)
- Self-Contained Anti-Freeze System
- 325 Gallon Rotationally Molded HDPE Tanks
- 2" x 4" Tubular Steel Frame Construction
- 16" Tires with 8 Lug Chrome Wheels
- Electric or Hydraulic Brake Systems
- Single 7,000 Lb. TorqueFlex Axle
- Analog & LED Pressure Gauges
- Dual Lockable Tool Boxes
- Water Flow ByPass System
- Tiger Tail Hose Protector
- 3 Rear, 1 Forward RPD Nozzle
- 6 Rear RPD Nozzle
- Powder Coat / Baked Finish
- Traffic Safety Warning Light
- Jump Jet Pulsation System
- Lockable Control Panel
- Handheld Spotlight
- Optional Custom Paint
- Drain Jet Extension
- Ball or Pintle Hitch



See More Units
www.usjetting.com